

Powerzone Technologies Pte Ltd

Generator sets powered by Perkins engine

Prime: 10KVA/8KW Standby: 11KVA/8.8KW



POWER THAT NEVER FAILS

Founded in 2009, Powerzone Technologies Pte Ltd specialized in the manufacturing of power generator sets and power plant solutions provider.

Powerzone Technologies is one of the leading power generation solution providers in Singapore, supplying High-Quality generator sets, and spare parts to a wide range of industries worldwide.

Our engines are supplied by the world's largest engine manufacturers, namely Perkins and Cummins as well as Caterpillar, MTU and Mitsubishi.

Designed to provide reliable power even in the most extreme climates and performed above and beyond expectations in ambient testing.

Custom designed and built to reduce service & maintenance costs.

Technical Data

Generator Set Model: PZ-10P		
Prime power (kVA/kW)	10/8	
Standby power (kVA/kW)	11/8.8	
Rated voltage line to line (V)	230/400	
Rated current (A)	14.4	
Maximum sound level (dBA@7m)	68	
Perkins Engine Model: 403D-11G		
Aspiration	Direct injection	
Fuel system	3	
Number of cylinders	1.131	
Displacement (L)	77x81	
Bore*Stroke (mm)	23.0:1	
Compression ratio	1500	
Rated speed (r/min)	Mechanical	
Governor	776x449x700	
Engine net weight (kg)	129.2	
Firing order	1-2-3	
Start motor (V)	12	
Lubrication System		
Oil capacity (L)	4.9	
Cooling System		
Total cooling capasity (L)	5.2	
Standard Features		
D 1'		

Perkins engine, radiator 50°C max, cooling fans are driven by fan belt, 12V charge alternator

24V charge alternator, single bearing alternator IP23

Insulation class H/H, standard auto control system

Main line circuit breaker / ACB, base fuel tank, 12V batteries, rac and cable

Exhaust system(Ripple flex exhaust pipe), Exhaust siphon, flange, muffler

User manual, battery charge



Powerzone Technologies Pte Ltd

Generator sets powered by Perkins engine

Prime: 10KVA/8KW Standby: 11KVA/8.8KW

Options

Water heater, alternator heater, PMG, water oil separator, daily fuel tank, remote control panel,

One set of air filter, fuel filter, oil filter, Automatic Transfer Switch (ATS), switch box

Alternator	
Model	S0L1-H1
Alternator brand	Stamford
Phase	3
Voltage (V)	230/400
Wiring type	12 wires
Bearing	1
Power factor	0.8
Frequency (Hz)	50
Prime power (kVA)	10
Exciter type	Brushless, self-excitation
Voltage regulation (%)	±0.5
Protection grade	IP 23
Insulation grade	Class H

Controller-Deepsea

Model

Comprehensive synchronising & loadsharing

Built-in governor and AVR control

Base load (kW export) functionality

Mains (utility) de-coupling protection

Generator power (kW, kVA) monitoring

Overload (kW & kVAR) protection


Emergency stop, Auto-Main-Failure (AMF)

DSE 6120

Generator Set Dimension (Basic unit)


Open Type

L*W*H (mm) : 1350*750*1050 Weight (kg) : 420

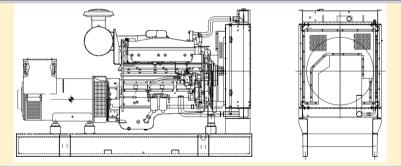

Silent Type

L*W*H (mm): 1900*850*1150 Weight (kg): 620

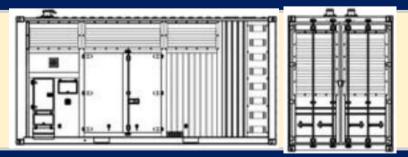

Warranty

Perkins Engine

12 months from date of delivery.

Generator

12 months from date of delivery.

Powerzone Technologies Pte Ltd

Blk 9, Kallang Place #06-09
Kallang Basin Industrial Estate Singapore 33915
Tel: +65-6299 3711 Fax: +65-6299 4911

Email: sales@powerzone.com.sg Website: www.powerzone.com.sg