



Powerzone Technologies Pte Ltd

Generator sets powered by Perkins engine

Prime: 150KVA/120KW
Standby: 165KVA/132KW



POWER THAT NEVER FAILS

Founded in 2009, Powerzone Technologies Pte Ltd specialized in the manufacturing of power generator sets and power plant solutions provider.

Powerzone Technologies is one of the leading power generation solution providers in Singapore, supplying High-Quality generator sets, and spare parts to a wide range of industries worldwide.

Our engines are supplied by the world's largest engine manufacturers, namely Perkins and Cummins as well as Caterpillar, MTU and Mitsubishi.

Designed to provide reliable power even in the most extreme climates and performed above and beyond expectations in ambient testing.

Custom designed and built to reduce service & maintenance costs.

Technical Data

Generator Set Model: PZ-150P

Prime power (kVA/kW)	150/120
Standby power (kVA/kW)	165/132
Rated voltage line to line (V)	230/400
Rated current (A)	216
Maximum sound level (dBA@7m)	75

Cummins Engine Model: 1106A-70TAG2

Aspiration	Four-stroke, water-cooled, In line, turbo charged aftercooled
Fuel system	Direct injection
Number of cylinders	6
Displacement (L)	7.01
Bore*Stroke (mm)	105x135
Compression ratio	16:1
Rated speed (r/min)	1500
Governor	Mechanical
Engine net weight (kg)	788
Firing order	1-5-3-6-2-4
Start motor (V)	12
Lubrication System	
Oil capacity	16.5
Cooling System	
Total coolant capacity	21

Standard Features

Perkins engine, radiator 50°C max, cooling fans are driven by fan belt, 12V charge alternator

24V charge alternator, single bearing alternator IP23

Insulation class H/H, standard auto control system

Main line circuit breaker / ACB, base fuel tank, 12V batteries, rac and cable

Exhaust system(Ripple flex exhaust pipe), Exhaust siphon, flange, muffler

User manual, battery charge



Powerzone Technologies Pte Ltd

Generator sets powered by Perkins engine

Prime: 150KVA/120KW
Standby: 165KVA/132KW

Options

Water heater, alternator heater, PMG, water oil separator, daily fuel tank, remote control panel,

One set of air filter, fuel filter, oil filter, Automatic Transfer Switch (ATS), switch box

Alternator

Model	UCI274F
Alternator brand	Stamford
Phase	3
Voltage (V)	230/400
Wiring type	12 wires
Bearing	1
Power factor	0.8
Frequency (Hz)	50
Prime power (kVA)	160
Exciter type	Brushless, self-excitation
Voltage regulation (%)	±0.5
Protection grade	IP 23
Insulation grade	Class H

Controller-Deepsea

Model

DSE 6120

Comprehensive synchronising & loadsharing

Built-in governor and AVR control

Base load (kW export) functionality

Mains (utility) de-coupling protection

Generator power (kW, kVA) monitoring

Overload (kW & kVAR) protection


Emergency stop, Auto-Main-Failure (AMF)



Generator Set Dimension (Basic unit)


Open Type

L*W*H (mm) : 2700*950*1450
Weight (kg) : 1850

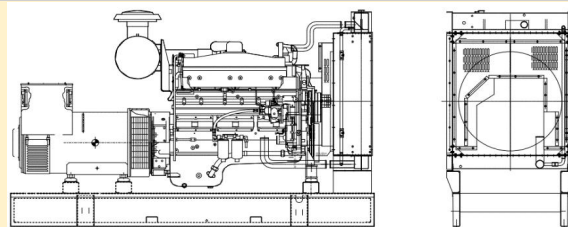

Silent Type

L*W*H (mm) : 3200*1100*1650
Weight (kg) : 2250

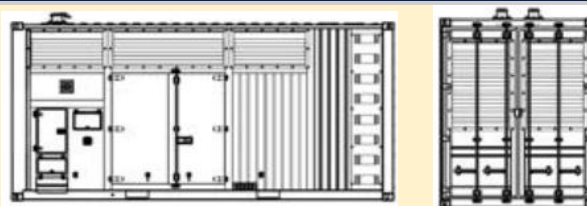

Warranty

Perkins Engine

12 months from date of delivery.

Generator

12 months from date of delivery.

Powerzone Technologies Pte Ltd

Blk 9, Kallang Place #06-09

Kallang Basin Industrial Estate Singapore 33915

Tel: +65-6299 3711 Fax: +65-6299 4911

Email : sales@powerzone.com.sg

Website : www.powerzone.com.sg